

M Y S T O N E



60x120 R
23¾"x47¼" R



100x100 R
40"x40" R

KT**L**
C E R A M I C A

Mystone

PORCELÁNICO ESMALTADO / GLAZED PORCELAIN TILE
ACABADO MATE / MATT FINISH

23³/₄"x47¹/₄" R 60x120 R



Mystone Pearl 60x120 R / Mystone Cement 60x120 R



Mystone

PORCELÁNICO ESMALTADO / GLAZED PORCELAIN TILE
ACABADO MATE / MATT FINISH

23³/₄"x47¹/₄" R 60x120 R



Mystone Pearl 60x120 R

G461R



Mystone Brown 60x120 R

G462R



Mystone Cement 60x120 R

G462R

 Rondaple: Disponible bajo pedido.
Skirting: Available on request.
 Mosaic 30x30 (5x5)
Disponible en todos los colores bajo pedido.
Available in all colors on request.

Mystone

PORCELÁNICO ESMALTADO / GLAZED PORCELAIN TILE
ACABADO MATE / MATT FINISH

40"x40" R 100x100 R




Mystone Brown 100x100 R



Mystone


PORCELÁNICO ESMALTADO / GLAZED PORCELAIN TILE
ACABADO MATE / MATT FINISH

40"x40" R 100x100 R

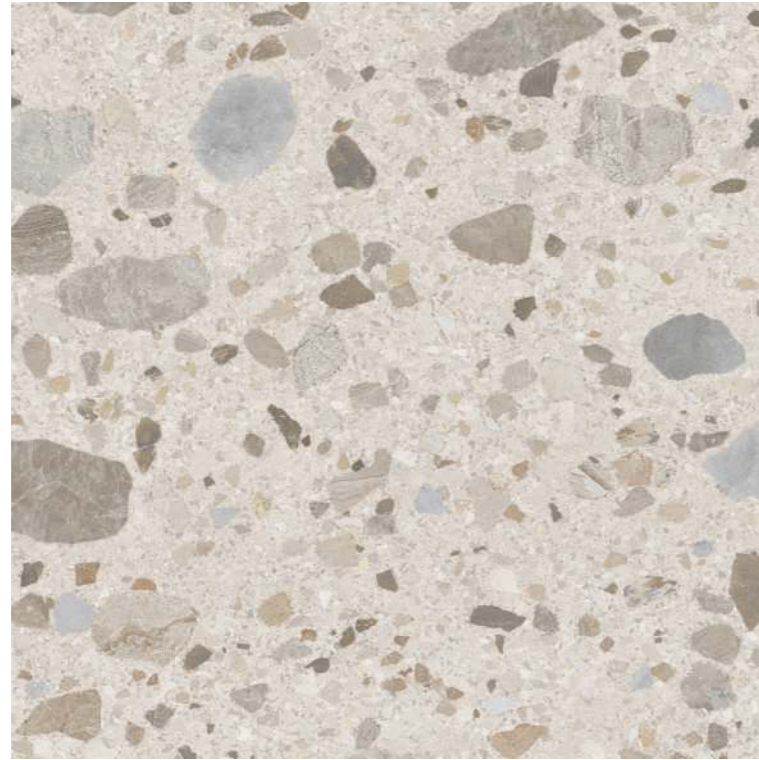


Mystone Pearl 100x100 R

G411R

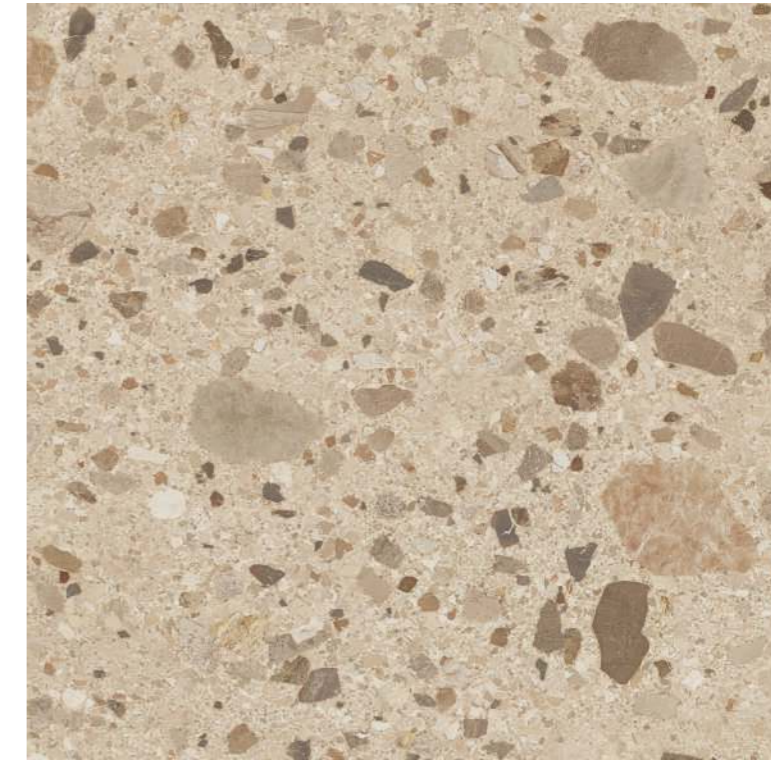

Mystone Brown 100x100 R

G412R

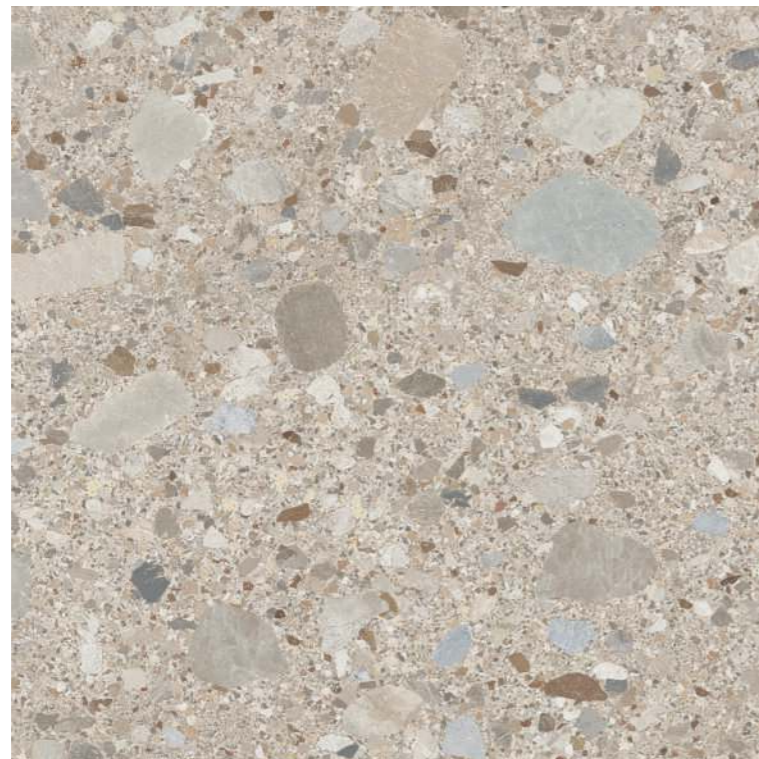

Mystone Cement 100x100 R

G412R

 Rodapié: Disponible bajo pedido.
Skirting: Available on request.
 Mosaic 30x30 (5x5)
Disponible en todos los colores bajo pedido.
Available in all colors on request.

Technical Characteristics

Características técnicas

DESCRIPCIÓN DEL TEST TEST DESCRIPTION		NORMA STANDARD	GRUPO Bla Porcelánico esmaltado Glazed Porcelain Tile
Absorción de agua / Water absorption		UNE-EN ISO 10545-3	Ev ≤ 0,5%
Fuerza de rotura / Breaking Strength		UNE-EN ISO 10545-4	≥ 1300 N
Resistencia a la flexión / Modulus of rupture		UNE-EN ISO 10545-4	≥ 35 N/mm ²
Abrasion superficial / Surface Abrasion		UNE-EN-ISO 10545-7	A consultar según modelo Consult according to model
Resistencia al cuarteo / Crazeing resistance		UNE-EN ISO 10545-11	Requerido Requested
Resistencia a la helada / Frost resistance		UNE-EN ISO 10545-12	Requerido Requested
Resistencia química Chemical resistance	Productos domésticos y de piscina Household chemicals and swimming pool salts	UNE-EN ISO 10545-13	Mínimo clase B Minimum class B
	Ácidos a baja concentración Low concentration of acids	UNE-EN ISO 10545-13	Mínimo clase LB Minimum class LB
	Bases a baja concentración Low concentration of alkalis	UNE-EN ISO 10545-13	Mínimo clase LB Minimum class LB
Resistencia a las manchas / Stain resistance		UNE-EN ISO 10545-14	Mínimo clase 3 Minimum Class 3

Symbology

Simbología



Packing List

PORCELANICO ESMALTADO / GLAZED PORCELAIN TILE								
Formato	Pzas/Cj	m ² /Cj	Kg/Cj	Kg/m ²	Pzs/Epl	Cjas/Epl	m ² /Epl	Kg/Epl
60x120 R (59,5x120)	2	1,4280	31,25	21,00	64	32	45,70	1.025,00
100x100 R (99,5x99,5)	2	1,9800	43,33	21,88	48	24	47,52	1.060,00

© Copyright KTL, S.L.U.

Reservados todos los derechos.

KTL se reserva el derecho de modificar las características de sus productos sin preaviso de ningún tipo.

Los acabados se dan a título indicativo, quedando bajo reserva los ajustes de los colores consecuencia de las técnicas de impresión. Por ello las fotografías de los productos expuestos no son contractuales.

All rights reserved.

KTL reserves the right to change the characteristics of its products without prior notice.

Information about the finishes of the goods is only provided as a guide. As a result of the printing techniques there might be differences between the colours printed in this catalogue and these of the real products. Colours shown in this catalogue are not contractual.

KTL
CERÁMICA

Partida Casablanca nº 6 / 12593 Moncofar, Castellón. Spain

Phone: +34 964 584 069 / e-mail: info@ktlceramica.com / web: www.ktlceramica.com