



# FS Vendome

Porcelain tiles




FS VENDOME | FS VENDOME



FS VENDOME


FS VENDOME



16 patterns


45,2 \* 45,2 \* 1 cm | 17 13/16 \* 17 13/16 \* 3/8"

NO RECTIFIED	NATURAL PRICE CODE BN61
FS VENDOME	24269

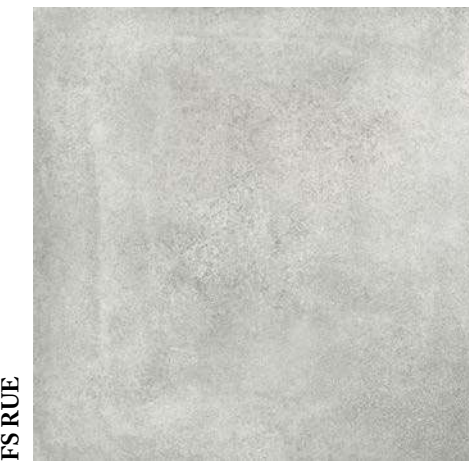

FS RUE

FS RUE



16 patterns

45,2 \* 45,2 \* 1 cm | 17 13/16 \* 17 13/16 \* 3/8"

NO RECTIFIED	NATURAL PRICE CODE BN61
FS RUE	24266



Composición con 6 piezas. Composition with 6 pieces.



Composición con 6 piezas. Composition with 6 pieces.

## CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO | ANTI-SLIP CHARACTERISTICS

Ensayo   Essay	Características   Features	Resultado   Result
DIN 51130	Ángulo crítico (Pies calzados)   Critical angle (footwear)	R9
BS-7976-2	Antideslizamiento (Test del péndulo)   Slip resistance (Pendulum test)	+36 Wet
UNE-ENV-12633	Antideslizamiento (Test del péndulo)   Slip resistance (Pendulum test)	Class 1
ANSI A.1371	Coefficiente de Fricción Dinámico   Dynamic Coefficient of Friction (DCOF)	>0,42
ISO 10545-7	Resistencia a la Abrasión Superficial/Resistance to Surface Abrasion	PEI 4

## CARACTERÍSTICAS TÉCNICAS TECHNICAL CHARACTERISTICS

joint	frost proof	versatile	matt
diferent shades	shade variation	various graphics	

## EMBALAJE | PACKING

(Los pesos aquí reflejados pueden sufrir ligeras variaciones en función del lote de producción. Weights shown here may slightly vary depending on the production lot.)

Formato   Sizes	Cajas   Boxes			Pallet				Cont./20'	Cont./20'
	Piezas	m <sup>2</sup> / sq.m	kg	Cajas	m <sup>2</sup> / sq.m	kg	Tamaño cm aprox.	m <sup>2</sup> / sq.m	m <sup>2</sup> / sq.m
45,2 * 45,2 * 1	5	1,02	23,70	66	67,32	1589,20	120 * 80 * 105	910,76	1016,66
inch	units	ft <sup>2</sup>	lb	Boxes	ft <sup>2</sup>	lb	Sizes Inch approx.	ft <sup>2</sup>	ft <sup>2</sup>
17 13/16 * 17 13/16 * 3/8	5	10,98	52,14	66	724,63	3496,24	47 1/4 * 31 1/2 * 41 5/16	9803,33	10943,25